F30MF







F30MF

Flat suction cup with cleats, mark free

- leftSuction cup of TPU, a mark free material that leaves no trace on the object being handled.
- Suitable for flat surfaces.
- Good stability and little inherent movement.
- Recommended when the lifting force is parallel to the surface of the object.


Lifting for	ces & Techni	ical data							
_	ce vertical to , at vacuum		_	ce parallel to , at vacuum		Volume	Min. curve radius	Max. vertical movement	Weight rubber part
20 -kPa	60 -kPa	90 -kPa	20 -kPa	60 -kPa	90 -kPa	cm ³	mm	mm	g
11.0	34.5	48	13,6	28	42	2.0	44	1.5	2.2

Material specifications						
Material	Colour	Hardness °Shore A	Temperature range °C			
Thermoelastic polyurethane, TPU	Transparent white	81	-20-80			


Material resista	ince						
Wear resistance	Oil	Weather & Ozone	Hydrolysis	Petrol	Concentrated acids	Alcohol	Oxidation
Excellent	Excellent	Excellent	Poor	Poor	Poor	Good	Good

Ordering information

	Complete suction cups	Art. No.
Α	Suction cup F30MF Thermoelastic polyurethane, M5 female	0101357
Α	Suction cup F30MF Thermoelastic polyurethane, M5 female, with dual flow control valve	0101363
В	Suction cup F30MF Thermoelastic polyurethane, G1/8" male, with mesh filter	0101358
В	Suction cup F30MF Thermoelastic polyurethane, $G1/8$ " male, with mesh filter and dual flow control valve	0101364
С	Suction cup F30MF Thermoelastic polyurethane, G1/8" male/M5 female, with mesh filter	0101362
D	Suction cup F30MF Thermoelastic polyurethane, 5xM5 female	0101361
D	Suction cup F30MF Thermoelastic polyurethane, 5xM5 female, with dual flow control valve	0101367

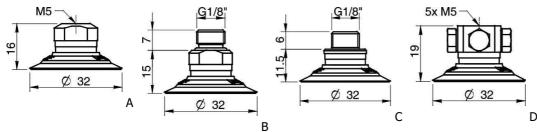

Rubber parts	Art. No.
Suction cup F30MF Thermoelastic polyurethane	0101141



Fittings	Art. No.
Fitting M5 female	3250003
Fitting M5 female, with dual flow control valve	3251001
Fitting G1/8" male, with mesh filter	3250085
Fitting G1/8" male, with mesh filter and dual flow control valve	3251002
Fitting G1/8" male/M5 female, with mesh filter	0101152
Fitting G1/8" male/M5 female, with dual flow control valve	3251004
Fitting 5xM5 female	0100260
Fitting 5xM5 female, with dual flow control valve	3251005
Fitting G1/8" male/M5 female, PA	3150196