BX75P





BX75P

Suction cup with 21/2 bellows

- Suitable for level adjustment and for uneven and porous surfaces such as cardboard, etc.
- Dual hardness allowing strength and stability in conjunction with softness and flexibility.
- DURAFLEX® material features the elasticity of rubber in combination with the wear resistance of polyurethane.
- The DURAFLEX® material is mark-free.
- Filter disk made of polyester PES4/14 and TPE.

Lifting forces & Technical data

Material	Outer Dia	Lifting force vertical to the surface, lbf, at vacuum level		Lifting force parallel to the surface, lbf, at vacuum level			Volume	Min. curve radius	Max. vertical movement	
	in	6 -inHg	18 -inHg	27 -inHg	6 -inHg	18 -inHg	27 -inHg	in^3	in	in
PU30°/60°	3.05	13.9	24.7	31.7	8.77*	18.7*	26.1*	4.88	0.91	1.02
PU60°	3.05	18.0	27.0	37.3	17.5*	25.6*	33.7*	4.88	0.91	1.02

^{*}The suction cup is not intended for handling shear lifts. The values are given as a dimensioning guide to be used when, e.g., the acceleration/retardation causes shear forces.

Material specifications

Material	Color	Hardness °Shore A	Temperature range °F
Polyurethane, PU30	Yellow transparent	30	50-122
Polyurethane, PU60	Green transparent	60	50-122

Material resistance


Wear resistance	Oil	Weather & ozone	Hydrolysis	Gasoline	Concentrated acids	Ethanol	Methanol	Oxidation
Excellent	Excellent	Excellent	Fair	Fair	Fair	Fair	Poor	Poor

Spare Part	Material	Temperature range °F	Part No.
Suction cup filter BX75P, 10 pcs	Polyester/TPE	-40-194	02.01.003

Ord	dering information			
	Suction cups with fitting		Weight (oz)	Part No.
Α	Suction cup BX75P Polyurethane	30/60 with filter, G3/8" male - 1/8" NPSF	female 2.82	BX75P.4K.07UF.F
В	Suction cup BX75P Polyurethane	30/60 with filter, thread insert G1/8" male	e 2.92	BX75P.5K.G60.F
В	Suction cup BX75P Polyurethane	60 with filter, thread insert G1/8" male	2.92	BX75P.5E.G60.F
С	Suction cup BX75P Polyurethane	30/60 with filter, thread insert G1/4" male	e 3.29	BX75P.5K.G59.F
С	Suction cup BX75P Polyurethane	60 with filter, thread insert G1/4" male	3.29	BX75P.5E.G59.F
D	Suction cup BX75P Polyurethane Vacuum Gripper System (VGS)	30/60 with filter, thread insert G3/8" male	e for 2.72	BX75P.5K.G40W.F
D	Suction cup BX75P Polyurethane Vacuum Gripper System (VGS)	60 with filter, thread insert G3/8" male fo	r 2.72	BX75P.5E.G40W.F
Е	Suction cup BX75P Polyurethane	30/60 with filter, brass 3/8" NPSF female	3.74	BX75P.5K.N40W.F


BX75P.5E.N40W.F

3.74

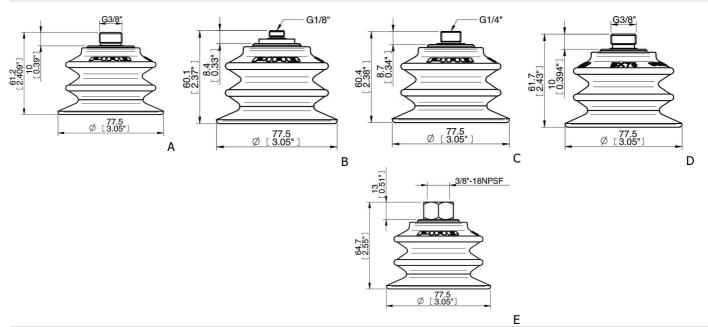

Suction cup BX75P Polyurethane 60 with filter, brass 3/8" NPSF female

Rubber parts	Part No.
Suction cup BX75P Polyurethane 30/60, with filter, for thread insert for Vacuum Gripper System (VGS)	BX75P.5K.F
Suction cup BX75P Polyurethane 60 with filter, for thread insert for Vacuum Gripper System (VGS)	BX75P.5E.F



Ε

Description	Part No.
Thread insert G1/8" male, with O-ring and mesh filter	02.00.716
Thread insert G1/4" male, with O-ring and mesh filter	02.01.077
Thread insert G3/8" male, with O-ring for Vacuum Gripper System (VGS)	01.06.797