


P6040 Function V30

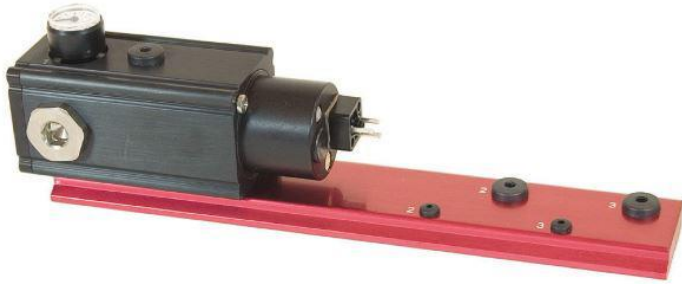

P6040 Function V30

- Patented COAX® technology
- Substantially lower air consumption
- Modular design for flexible performance
- Compact and durable with no moving parts
- With its low energy consumption it can be controlled directly from the control system

Technical data

Description	Unit	Value
Feed pressure	MPa	0.7
Noise level	dB(A)	57–76
Temperature range	°C	0–50
Voltage	V	24
Voltage range	V	14–28
Current consumption	mA	40
Ripple	V _P	1 V _{rms}
Safety classification	IP	65
Display		LED
Weight	g	4900–5900
Material		Al, PA, NBR, SS, POM, HDPE, CuZn, PBT

Ordering information

Description

Art. No.

Function V30

0117783

Example

Ordering No.

P6040 Vacuum, Pi48-3X5, Mounting T-slot, Cover plate with function V30, Connection G 2 1/2" and silencer

P6040 V AA 00 AC 05

